


# TALA OFFSHORE AS

## END CAPS, BUTT WELD FITTINGS

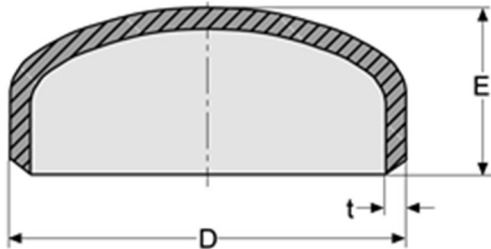

### ASTM A403 / A815 ASME B 16.9

### 1/2" to 24". Schedule range 5S to Schedule 160

Nominal pip Size inch	Schedule	Nominal size in mm D	T	E	Weight kg/pc
1/2"	10S	21,3	2,11	25,4	0,040
	40S	21,3	2,77	25,4	0,050
	80S	21,3	3,73	25,4	0,050
3/4"	10S	26,7	2,11	25,4	0,050
	40S	26,7	2,87	25,4	0,060
	80S	26,7	3,91	25,4	0,060
1"	10S	33,4	2,77	38,1	0,090
	40S	33,4	3,38	38,1	0,130
	80S	33,4	4,55	38,1	0,130
1 1/4"	10S	42,2	2,77	38,1	0,130
	40S	42,2	3,56	38,1	0,170
	80S	42,2	4,85	38,1	0,180
1 1/2"	10S	48,3	2,77	38,1	0,140
	40S	48,30	3,68	38,1	0,230
	80S	48,30	5,08	38,1	0,240
2"	10S	60,30	2,77	38,1	0,170
	40S	60,30	3,91	38,1	0,270
	80S	60,30	5,54	38,1	0,340
2 1/2"	10S	73,00	3,05	38,1	0,250
	40S	73,00	5,16	38,1	0,450
	80S	73,00	7,01	38,1	0,510

# TALA OFFSHORE AS

3"	10S	88,90	3,05	50.8	0.400
	40S	88,90	5,49	50.8	0.710
	80S	88,90	7,62	50.8	0.850
4"	10S	114,30	3,05	63.5	0.650
	40S	114,30	6,02	63.5	1.220
	80S	114,30	8,56	63.5	1.610
5"	10S	141,30	3,4	76.2	1.020
	40S	141,30	6,55	76.2	1.910
	80S	141,30	9,53	76.2	2.550
6"	10S	168,30	3,4	88.9	1.360
	40S	168,30	7,11	88.9	3.230
	80S	168,30	10,97	88.9	4.540
8"	10S	219,10	3,76	101.6	2.490
	40S	219,10	8,18	101.6	5.670
10"	10S	273,10	4,19	127.0	4.900
	40S	273,10	9,27	127.0	9.210
12"	10S	323,90	4,57	152.4	6.530
	40S	323,90	9,53	152.4	13.06
14"	10S	355,60	4,78	165.1	8.160
	STD	355,60	9,53	165.1	15.90
16"	10S	406,40	4,78	177.8	15.51
	STD	406,40	9,53	177.8	20.00
18"	10S	457,20	4,78	203.2	17.96
20"	10S	508,00	5,54	228.6	27.22
24"	10S	609,60	6,35	266.7	34.47