


# TALA OFFSHORE AS

## HEXAGON BUSHINGS, THREADED

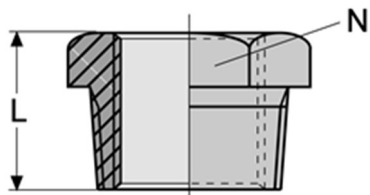

Cast in ASTM 316L, according to ISO 7/1

Thread	L	Width across
in.	mm	Flats mm N
¼ x 1/8	15.2	16
3/8 x 1/8	16.5	18
3/8 x ¼	16.5	18
½ x 1/8	21	26
½ x ¼	21	26
½ x 3/8	21	26
¾ x 3/8	24	30
¾ x ½	24	30
1 x ¼	27	35
1 x 3/8	27	35
1 x ½	27	35
1 x ¾	27	35
1 ¼ x ½	30	45
1 ¼ x ¾	30	45
1 ¼ x 1	30	45
1 ½ x ½	36	52
1 ½ x 1	36	52
1 ½ x 1 ¼	36	52
2 x 1 ¼	36	63
2 x 1 ½	36	63
2 ½ x 2	45	81
3 x 1 ½	47	95
3 x 2	47	95
3 x 2 ½	47	95

Stainless forged, threaded fittings in F304/304L and F316/316L (dual marked). All ASME 3000lbs. threaded fittings are white pickled with hardness according to NACE MMR0175, IC according to ASTM A262E and PMI tested.

Threaded fittings are certified according to EN 10204/3.1.

### Threads

The threaded fittings are supplied with NPT threads (type C), standardized under ANSI/ASME B120-1. The internal and external threads are tapered.



ANSI/ASME B1.20.1